

Traffic Calming Fact Sheets

May 2018 Update

Speed Hump

Description:

- Rounded (vertically along travel path) raised areas of pavement typically 12 to 14 feet in length
- Often placed in a series (typically spaced 260 to 500 feet apart)
- Sometimes called road humps or undulations

Applications:

- Appropriate for residential local streets and residential/neighborhood collectors
- Not typically used on major roads, bus routes, or primary emergency response routes
- Not appropriate for roads with 85th-percentile speeds of 45 mph or more
- Appropriate for mid-block placement, not at intersections
- Not recommended on grades greater than 8 percent
- Work well in combination with curb extensions
- Can be used on a one-lane one-way or two-lane two-way street



(Source: City of Boulder, Colorado)



(Source: PennDOT Local Technical Assistance Program)

ITE/FHWA Traffic Calming EPrimer: https://safety.fhwa.dot.gov/speedmgt/traffic_calm.cfm

Design/Installation Issues:

- ITE recommended practice - "Guidelines for the Design and Application of Speed Humps"
- Typically 12 to 14 feet in length; other lengths (10, 22, and 30 feet) reported in practice in U.S.
- Speed hump shapes include parabolic, circular, and sinusoidal
- Typically spaced no more than 500 feet apart to achieve an 85th percentile speed between 25 and 35 mph
- Hump heights range between 3 and 4 inches, with trend toward 3 - 3 ½ inches maximum
- Often have associated signing (advance warning sign before first hump in series at each hump)
- Typically have pavement markings (zigzag, shark's tooth, chevron, zebra)
- Taper edge near curb to allow gap for drainage
- Some have speed advisories
- Need to design for drainage, without encouraging means for motorists to go around a hump

Potential Impacts:

- No impact on non-emergency access
- Average speeds between humps reduced between 20 and 25 percent
- Speeds typically increase approximately 0.5 to 1 mph midway between humps for each 100 feet Beyond the 200-foot approach and exit of consecutive humps
- Traffic volumes diversion estimated around 20 percent; average crash rates reduced by 13 percent

Emergency Response Issues:

- Impacts to ease of emergency-vehicle throughput
- Approximate delay between 3 and 5 seconds per hump for fire trucks and up to 10 seconds for ambulances with patients

Typical Cost (2017 dollars):

- Cost ranges between \$2,000 and \$4,000

Traffic Calming Fact Sheets

May 2018 Update

Speed Cushion

Description:


- Two or more raised areas placed laterally across a roadway with gaps between raised areas
- Height and length similar to a speed hump; spacing of gaps allow emergency vehicles to pass through at higher speeds
- Often placed in a series (typically spaced 260 to 500 feet apart)
- Sometimes called speed lump, speed slot, and speed pillow

Applications:

- Appropriate on local and collector streets
- Appropriate at mid-block locations only
- Not appropriate on grades greater than 8 percent



(Source: James Barrera, Horrocks, New Mexico)

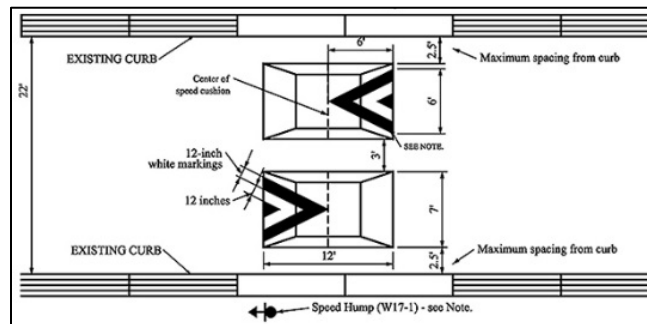

(Source: Delaware Department of Transportation)

ITE/FHWA Traffic Calming EPrimer: https://safety.fhwa.dot.gov/speedmgt/traffic_calm.cfm

Design/Installation Issues:

- Two or more cushions at each location
- Typically 12 to 14 feet in length and 7 feet in width
- Cushion heights range between 3 and 4 inches, with trend toward 3 - 3 ½ inches maximum
- Speed cushion shapes include parabolic, circular, and sinusoidal
- Material can be asphalt or rubber
- Often have associated signing (advance-warning sign before first cushion at each cushion)
- Typically have pavement markings (zigzag, shark's tooth, chevron, zebra)
- Some have speed advisories

Potential Impacts:

- Limited-to-no impact on non-emergency access
- Speeds determined by height and spacing; speed reductions between cushions have been observed averaging 20 and 25 percent
- Speeds typically increase by 0.5 mph midway between cushions for each 100 feet of separation
- Studies indicate that average traffic volumes have reduced by 20 percent depending on alternative routes available
- Average collision rates have been reduced by 13 percent on treated streets

Emergency Response Issues:

- Speed cushions have minimal impact on emergency response times, with less than a 1 second delay experienced by most emergency vehicles

Typical Cost (2017 dollars):

- Cost ranges between \$3,000 and \$4,000 for a set of rubber cushions


Speed Table/Raised Crosswalks

Description:


- Long, raised speed humps with a flat section in the middle and ramps on the ends; sometimes constructed with brick or other textured materials on the flat section
- If placed at a pedestrian crossing, it is referred to as a raised crosswalk
- If placed only in one direction on a road, it is called an offset speed table

Applications:

- Appropriate for local and collector streets; mid-block or at intersections, with/without crosswalks
- Can be used on a one-lane one-way or two-lane two-way street
- Not appropriate for roads with 85th percentile speeds of 45 mph or more
- Typically long enough for the entire wheelbase of a passenger car to rest on top or within limits of ramps
- Work well in combination with textured crosswalks, curb extensions, and curb radius reductions
- Can be applied both with and without sidewalks or dedicated bicycle facilities
- Typically installed along closed-section roads (i.e. curb and gutter) but feasible on open section

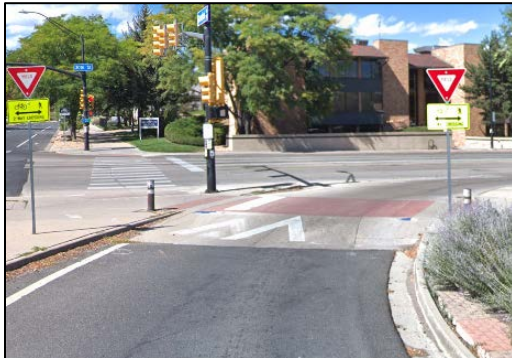

(Source: Google Maps, Boulder, Colorado)

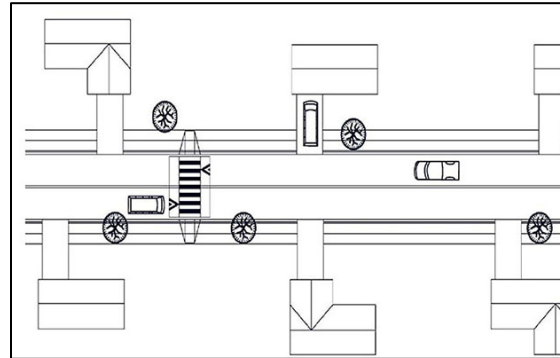

(Source: Delaware Department of Transportation)

ITE/FHWA Traffic Calming EPrimer: https://safety.fhwa.dot.gov/speedmgt/traffic_calm.cfm

Design/Installation Issues:

- ITE recommended practice – “Guidelines for the Design and Application of Speed Humps”
- Most common height is between 3 and 4 inches (reported as high as 6 inches)
- Ramps are typically 6 feet long (reported up to 10 feet long) and are either parabolic or linear
- Careful design is needed for drainage
- Posted speed typically 30 mph or less

Potential Impacts:

- No impact on non-emergency access
- Speeds reductions typically less than for speed humps (typical traversing speeds between 25 and 27 miles per hour)
- Speeds typically decline approximately 0.5 to 1 mph midway between tables for each 100 feet beyond the 200-foot approach and exit points of consecutive speed tables
- Average traffic volumes diversions of 20 percent when a series of speed tables are implemented
- Average crash rate reduction of 45 percent on treated streets
- Increase pedestrian visibility and likelihood of driver yield compliance
- Generally not appropriate for BRT bus routes

Emergency Response Issues:

- Typically preferred by fire departments over speed humps, but not appropriate for primary emergency vehicle routes; typically less than 3 seconds of delay per table for fire trucks

Typical Cost (2017 dollars):

- Cost ranges between \$2,500 and \$8,000 for asphalt tables; higher for brickwork, stamped asphalt, concrete ramps, and other enhancements sometimes used at pedestrian crossings


Raised Intersection

Description:

- Flat raised areas covering entire intersections, with ramps on all approaches and often with brick or other textured materials on the flat section and ramps
- Sometimes referred to as raised junctions, intersection humps, or plateaus

Applications:

- Intersections of collector, local, and residential streets
- Typically installed at signalized or all-way stop controlled intersections with high pedestrian crossing demand
- Works well with curb extensions and textured crosswalks
- Often part of an area-wide traffic calming scheme involving both intersecting streets in densely-developed urban areas

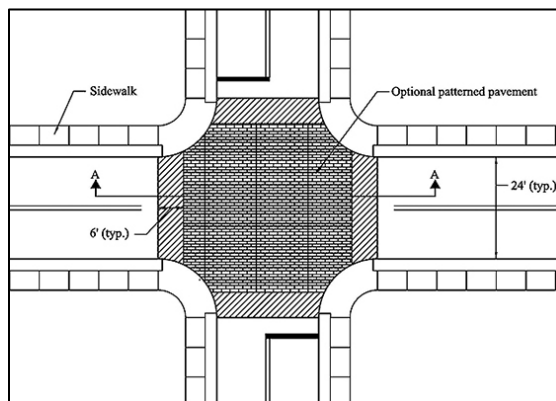

(Source: Delaware Department of Transportation)



(Source: Chuck Huffine, Phoenix AZ)

ITE/FHWA Traffic Calming EPrimer: https://safety.fhwa.dot.gov/speedmgt/traffic_calm.cfm

Design/Installation Issues:

- Used at intersections with a maximum speed limit of 35 mph
- Typically rise to sidewalk level; appropriate if crosswalks exist on all four legs
- Appropriate if a dedicated bicycle facility passes through the intersection
- Detectable warnings and/or color contrasts must be incorporated to differentiate the roadway and the sidewalk
- May require bollards to define edge of roadway
- Storm drainage/underground utility modifications are likely necessary
- Minimum pavement slope of 1 percent to facilitate drainage

Potential Impacts:

- Reduction in through movement speeds likely at intersection
- Reduction in mid-block speeds typically less than 10 percent
- No impact on access
- Can make entire intersections more pedestrian-friendly
- No data available on volume diversion or safety impacts

Emergency Response Issues:

- Slows emergency vehicles
- Appropriate for primary emergency vehicle routes and streets with access to a hospital or emergency medical services

Typical Cost (2017 dollars):

- Costs range between \$15,000 and \$60,000